

GOVERNMENT CORNER RESTORATION FORM

FILED

TOWNSHIP 24S RANGE 04W SEC. 17 PLSS # 040262

Date: 11-24-2015 By: SC

DOUGLAS COUNTY OREGON

DATE FEB. 20, 2015

This survey consists of:

Map: _____

Narrative: _____

Corner Rpt: CS67/42-11

Corner Designation

DOUGLAS COUNTY SURVEYOR

Previous Renewals 1963
Monument(s) Found: _____ (Condition and Source)

- _____ Condition Report
- _____ Not Found
- Renewed
- _____ Unrecorded
- _____ Surveyed In
- _____ Referenced Out

MONUMENT DETAIL

COUNTY SURVEYORS OFFICE

ESE	T
DLC	24
40	5

R4W

1963

FROM THE 1963 RENEWAL A 2 1/2 INCH DIAMETER BRASS CAP (MARKED AT RIGHT) ON A 1 INCH I.D. IRON PIPE IS FIRMLY SET PROTRUDING 12 INCHES ABOVE GROUND.

Accessories Found

ONE ORIGINAL BT AN OAK 12" DIA., NOW A 30 INCH DIAMETER WHITE OAK WITH PARTIALLY HEALED, PREVIOUSLY OPENED BLAZES (NO VISIBLE SCRIBING); BEARS N50°E, 21 1/2 FEET DISTANT (AS PER RECORD).
NO EVIDENCE OF STAMP OR REMAINS.

TWO 1963 RENEWAL BEARING TREES. A 12" W. OAK NOW A DOUBLE TRUNK WHITE OAK THE MOST NOT THE 17 INCH DIAMETER TRUNK OF WHICH HAS A FULLY HEALED DOUBLE BLAZE. THE C.R.C. OF THIS TREE BEARS S03 1/2°W, 32.0 FEET DISTANT (RECORD OF S2°W, 31.6' IS TO SCRIBED TRUNK).

A 14" W. OAK NOW A 20 INCH DIAMETER WHITE OAK WITH A FULLY HEALED DOUBLE BLAZE; BEARS S66 1/2°W, 24 1/2 FEET DISTANT (RECORD S65°W BEARING TO BLAZE), 24.1'.

C.R.C. = Lower Root 2011

C.S. File 67/42-11

N/A


N/A

New Accessories

AN 18 INCH DIAMETER BLACK OAK SCRIBED "ESE DLG 40" "CS BT" ON A DOUBLE BLAZE,
BEARS N 46 1/2 "W, 75' FEET DISTANT.

Sketch of Monument, Accessories, and General Area

Location & Comments

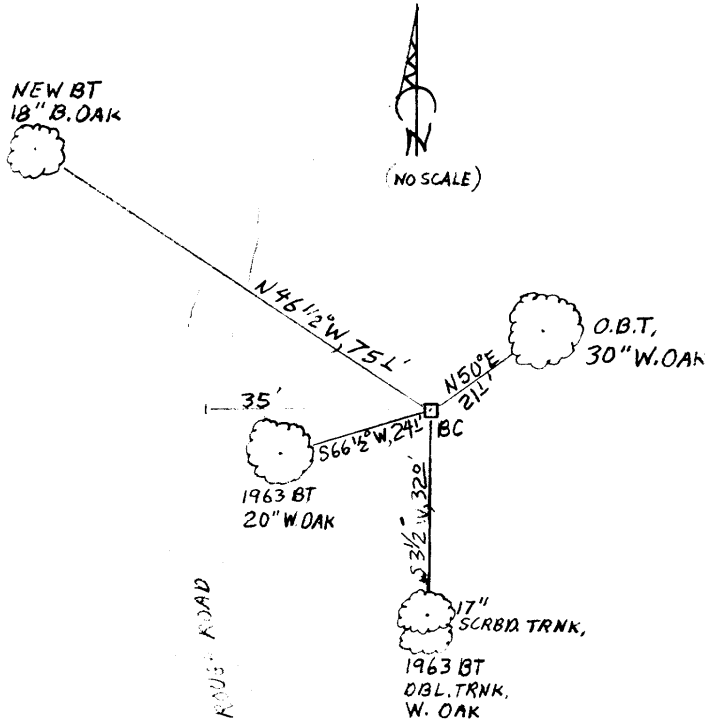

MONUMENT IS ON GENTLE SOUTH
SLOPE IN OPEN WOOD MAINLY OF
OAK AND HAWTHORN WITH SOME FIR
AND MADRONE

Comp. Decline. 15 1/4 ° E

Agency DCSO

Party Chief STEPHEN JOHN FLAUSE

Note keeper Stephen John Flause

Witnesses MIKE S. KOCH

Surveyor's Seal

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Kristian O. DeGroot

OREGON
JULY 17, 1981
KRISTIAN O. DeGROOT
1941

RENEWAL 12/31/15